



## Specifications

<b>Type</b>	Twin Screw Tug
<b>Designed By</b>	Blount Boats / Bristol Harbor Group
<b>Hull Constructon</b>	3/8" & 1/2 Bottom PL, 3/8" side PL, 3/8" aft deck PL
<b>Tank Capacities</b>	Fuel Oil: 20,600 Gallons Fresh Water: 2,000 Gallons Lube Oil: 500 Gallons Waste Oil: 500 Gallons
<b>Main Propulsion</b>	(2) Caterpillar 3512 B 1100 HP @ 1200 RPM
<b>Marine Gear</b>	(2) Twin Disc MG-5600 4.03:1 Reduction
<b>Propellers</b>	(2) Kahlenburg Non-singing, Stainless, 4-Blade 76" D x 56" P


## General Dimensions

<b>Length Overall</b>	85.3 feet
<b>Beam</b>	26 feet
<b>Depth</b>	11.0 feet
<b>Design Draft</b>	9 feet
<b>Air Draft</b>	26 feet (mast down)
<b>Crew Quarters</b>	(4) double bunks (8 crew)
<b>Certification</b>	ABS Tonnage Certificate ABS Loadline Certificate


## Other Features

<b>Deck Machinery</b>	60 HP Timberland Almon Johnson towing machine
-----------------------	--


# 2200 HP TWIN SCREW TUG

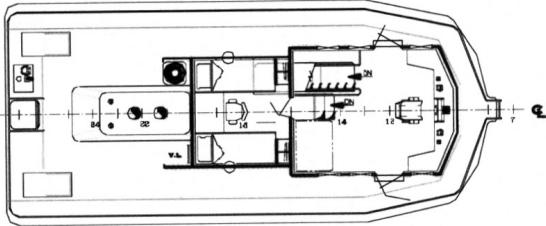

Bridge Deck Plan

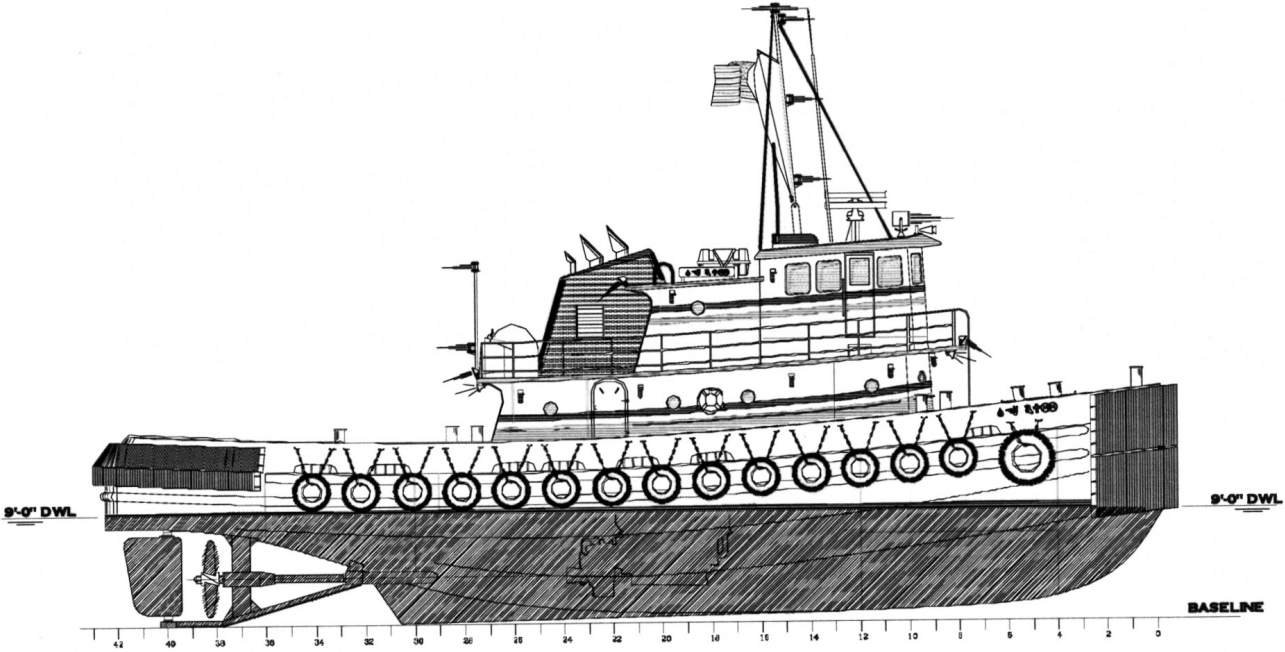

Outward Profile

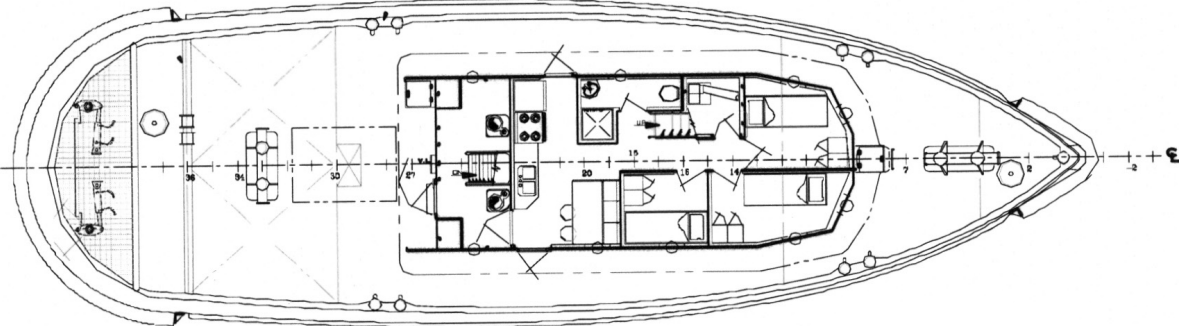

Main Deck Plan